



## foot mounted hoist MT, with 2 rope falls (reeving 2/1)

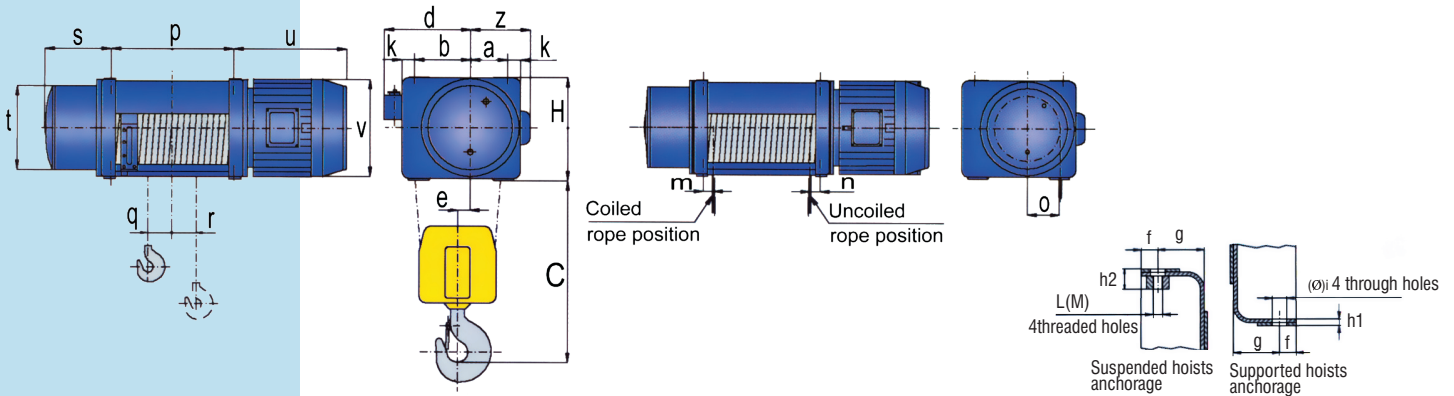

Hoist type	Capacity, kg	Rope, mm	Fixed dimensions, mm																
			C	H	a	b	k	d	e	f	g	h1	h2	i	L	m	n	o	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
MT305	1000	Ø7	500	321	105	190	50	300	53	19	27	13	28	15	14	45	48	84	
MT308	1600	Ø7	600	321	105	190	50	300	53	19	27	13	28	15	14	45	48	84	
MT312	2500	Ø10	670	321	105	190	50	300	40	19	27	13	34	17	20	48	56	110	
MT316	3200	Ø10	670	321	105	190	50	300	40	19	27	13	34	17	20	48	56	110	
MT525	5000	Ø12	770	378	133	212	53	325	41	21	31	18	48	21	24	60	61	133	

Hoist type	Hook travel, m	Variable dimensions, mm										
		p	q	r	s	t	Motors					
							NA			VA		
1	2	3	4	5	6	7	8	9	10	11	12	13
MT305	10	395	91	61	200	218	375	192	190	376	220	200
	14	520	154	61	200	218	375	192	190	376	220	200
	20	700	244	61	200	218	375	192	190	376	220	200
MT308	10	395	91	61	200	218	376	220	200	483	257	220
	14	520	154	61	200	218	376	220	200	483	257	220
	20	700	244	61	200	218	376	220	200	483	257	220
MT312	10	440	90	77	246	292	483	257	220	483	257	220
	14	570	155	77	246	292	483	257	220	483	257	220
	20	775	258	77	246	292	483	257	220	483	257	220
MT316	10	440	90	77	246	292	483	257	220	607	310	240
	14	570	155	77	246	292	483	257	220	607	310	240
	20	775	258	77	246	292	483	257	220	607	310	240
MT525	10	455	90	78	266	360	612	310	240	-	-	-
	14	590	157	78	266	360	612	310	240	-	-	-
	20	795	260	78	266	360	612	310	240	-	-	-
	26	995	360	78	266	360	612	310	240	-	-	-

Hoist capacity, kg	Weight, kg			
	Hook travel, m			
	10	14	20	26
1000	165	172	190	200
1600	170	187	207	210
2500	225	255	285	317
3200	255	283	311	340
5000	404	445	485	525



Hoist type	Capacity, kg	Hook position	Hook travel, m															
			10				14				20				26			
			R1	R2	R3	R4	R1	R2	R3	R4	R1	R2	R3	R4	R1	R2	R3	R4
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
MT305	1000	uep	351	404	114	131	378	435	87	100	400	461	65	74	-	-	-	-
		dep	169	195	295	341	187	215	277	321	198	228	267	307	-	-	-	-
MT308	1600	uep	561	647	182	210	604	697	139	160	640	738	103	119	-	-	-	-
		dep	271	312	472	545	299	344	444	513	316	365	427	492	-	-	-	-
MT312	2500	uep	916	885	355	344	997	964	274	265	1069	1034	202	195	-	-	-	-
		dep	433	419	838	810	475	459	796	770	522	504	749	725	-	-	-	-
MT316	3200	uep	1172	1133	455	440	1276	1233	351	340	1369	1323	258	250	-	-	-	-
		dep	555	536	1072	1037	608	588	1019	985	668	645	959	928	-	-	-	-
MT525	5000	uep	1729	1760	749	762	1899	1932	579	590	2050	2085	429	436	2136	2173	342	349
		dep	814	829	1664	1693	912	927	1567	1594	996	1013	1482	1509	1045	1063	1433	1459

uep – upper end position of the hook; dep – down end position of the hook.